




Product Features

- to sample drinking water and determine microbiological parameters according to the German TrinkwV drinking-water regulation
- for simple retrofitting at the output of the angle valve
- suitable for angle valves with 10 mm outlet compression connection
- sampling pipe can be disinfected by flame
- valve completely chrome-plated
- PTFE seat gasket
- inlet 10 x 1.25 pipe, outlet G3/8 male thread with compression nut for 10 mm pipe
- valve is operated with 5 mm allen key (not in package)
- made of brass, nickel plated
- free from dead spots
- incl. Allen key

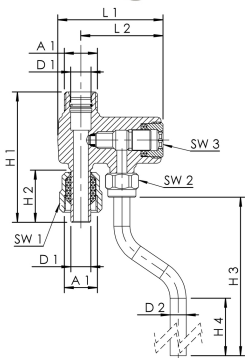

Standards and Approvals

- DVGW approval
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- UBA BWGL Metalle + DVGW W 551-8

Technical data

- pressure rating PN 10
- max. operating temperature 90 °C

| Part no. | DN | A1 | D1 (mm) | D2 (mm) | H1 (mm) | H2 (mm) | H3 (mm) | H4 (mm) | L1 (mm) | L2 (mm) | SW1 (mm) | SW2 (mm) | SW3 | kg |
|------------|----|-------|---------|---------|---------|---------|---------|---------|---------|---------|----------|----------|-----|------|
| 1880001000 | 10 | G 3/8 | 10 | 8 | 65 | 26 | 153.5 | 110.5 | 52.5 | 41 | 19 | 15 | 5 | 0.29 |

Spare parts

- drain elbow for angled sampling valve, figure 188 99 002
- CV cartridge for angled sampling valve, figure 188 99 001