




Product Features

- temperature sensor for connection to BMS
- temperature range 0 - 100 °C
- four-wire technology
- tolerance class A
- for insertion in the isolating unit of the MULTI-THERM circulation balancing valve, the measuring nozzles of the MULTI-FIX-PLUS circulation balancing valve and the measuring nozzles of the MULTI T-PIECE
- for all dimensions
- can be used for all valves with frontal drain opening in combination with drain valve with immersion sleeve (part no. J71091500000600)

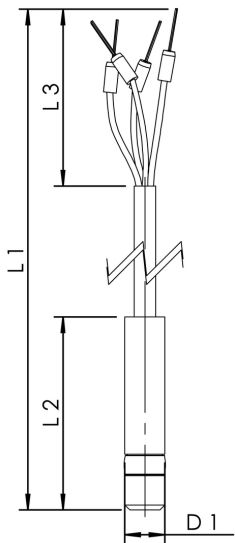

Technical data

- pressure rating PN 16
- min. operating temperature 0 °C
- max. operating temperature 100 °C
- protection class IP67

| Part no. | D1 (mm) | L1 (mm) | L2 (mm) | L3 (mm) | kg |
|-----------------|------------|------------|------------|------------|------|
| T510014000003KP | 9.6 | 2000 | 45 | 40 | 0.10 |